





Wuxi Xiangjing Machinery Co., Ltd  
(Sino-Japanese Joint Venture)





More responsibilities

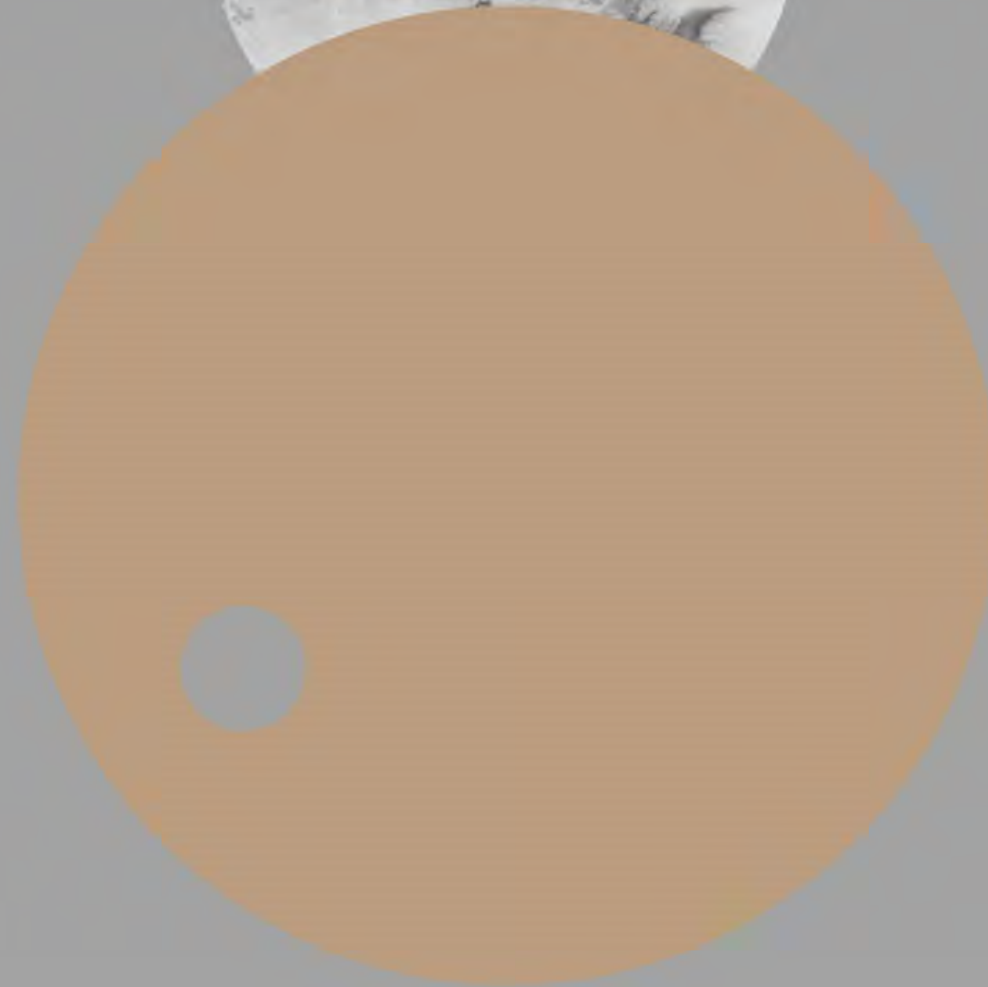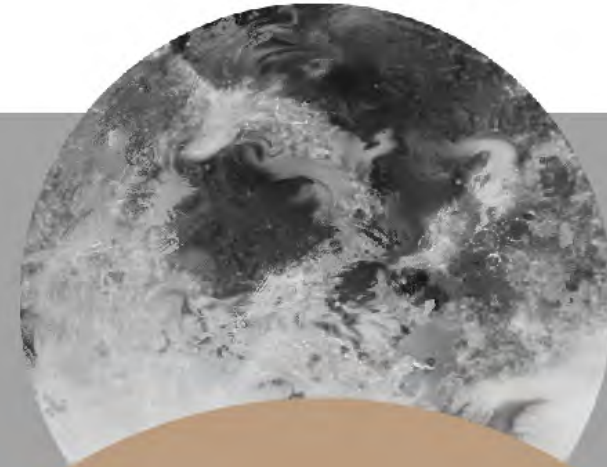

A bakery equipment manufacturer  
who focuses on the details

## ENTERPRISE ADVANTAGE



**Japanese quality  
Chinese price**

**Bakery store design  
and custom-made**

**We adhere to  
product is no.1.**

**We adhere to  
user is no.1**

**We adhere to  
experience is no.1**

Be more less lax

# COMPANY PROFILE

## About us

> > > > > > >

Wuxi Xiangjing Machinery Co.,Ltd is a subsidiary established in Wuxi, China by World-Seiki Co.,Ltd, put into operation in May 2011.

- The first workshop of World Seiki Co., Ltd. is set up on Jun. 1, 1983.
- The second workshop is completed in 1995.
- 10 offices and 86 agencies are set up throughout Japan in 2010.
- Wuxi Xiangjing Machinery Co., Ltd is set up in Wuxi, China in 2011.

World Seiki Co., Ltd is a special bakery equipment and catering equipment manufacturer with the over 30 years of production. At present we have spiral mixer, planetary mixer, divider, proofer, retarder proofer, deck ovens, rotary oven and convection ovens for bakery shops and bakery plant. We can provide the powerful technical support to our products, and gas ovens are exempted from inspection in the Japanese market. Now we will be the reliable partner in the bakery industry based on "Japanese quality, Chinese price".

# PRODUCT CONTENTS

- 
- 
- P05 Planetary mixer series
- P09 Spiral mixer series
- P11 Divider series
- P14 Dough sheeter series
- P16 Molder series
- P18 Slicer series
- P21 Proofer series
- P26 Convection oven series
- P30 Deck oven series
- P40 Rotary oven
- P42 Trolley series
- P43 Tunnel oven series
- P45 Combined ovens
- P48 Cookies equipment
- P53 Toast line
- P56 Hamburger Line
- P58 Moon Cake line

# PLANETARY MIXER

>>>>>



## DESKTOP PLANETARY MIXER



WSK-7L



WSK-7L-DGN

Model	WSK-7L	WSK-7L-DGN
Volume	7L	7L
Speed ( rpm )	0-320(revolution) 0-1050(rotation)	0-320(revolution) 0-1050(rotation)
Bowl size(mm)	Inner dia.	223
	Inner depth	210
Overall size(mm)	Width	234
	Depth	389
	Height	400
Power (kw)	0.380	0.55
Voltage (v)	220V	
Weight (kg)	18	
Standard accessory	Bowl, ball	Bowl, ball, hook, fan



Wuxi Xiangjing Machinery Co., Ltd  
(Sino-Japanese Joint Venture)

## GEAR TYPE MIXER



Wuxi Xiangjing Machinery Co., Ltd  
(Sino-Japanese Joint Venture)

## INFINITELY VARIABLE SPEED PLANETARY MIXER



Model	WSK-10L	WSK-20L	WSK-20L-H	WSK-30L	WSK-40L	WSK-60L	
Volume	10L	20L		30L	40L	60L	
Speed ( rpm )	43/150 91/315 150/519	38/127	88/288 163/537	33/105	66/209 129/406	30/100 48/161 80/268	
Bowl size(mm)	Inner dia.	248	340		370	390	460
	Inner depth	235	302		365	386	448
Overall size(mm)	Width	450	530	560	650		800
	Depth	400	480	560	620		620
	Height	690	810	1050	1000		1320
Power (kw)	0.375	0.375		0.75		2.25	
Voltage (v)	220	220 / 380		380		380	
Weight (kg)	74	90	95	170		350	
Standard accessory	Bowl, ball, fan						
Optional accessory	Hook, protective net, rack			Hook, protective net			

Model	WSK-20L-INV	WSK-40L-INV	WSK-60L-INV	
Volume	20L	40L	60L	
Speed ( rpm )	180-508	125-424	165-450	
Bowl size(mm)	Inner dia.	340	390	460
	Inner depth	302	400	448
Overall size(mm)	Width	560	740	840
	Depth	840	1010	1100
	Height	950	1400	1500
Power (kw)	1.1	2.2	3	
Voltage (v)	220	220/380		
Weight (kg)	125	170	385	
Standard accessory	Bowl, ball, protective net			
Optional accessory	Hook, rack	Hook		

# SPIRAL MIXER

>>>>>



Desk-top WSK-3

WSK-25

WSK-50T

WSK-80T

# SPIRAL MIXER



WSK-120T



WSK-200A

Model		WSK-3	WSK-25	WSK-50T	WSK-80T	WSK-120T	WSK-200A
Volum(kg)	Flour	3.5	12.5	25	50	75	125
	dough	5	25	50	80	120	200
Spiral speed(rpm)	1 <sup>st</sup> speed	108	140	135	125	110	105
	2 <sup>nd</sup> speed	288	280	270	250	220	210
Bowl speed(rpm)	1 <sup>st</sup> speed	10	12.8	17.8	17.2	13	11
	2 <sup>nd</sup> speed	25	25.5	17.8	17.2	13	-
Bowl size(mm)	Inner dia.	260	442	546	672	769	904
	Inner depth	175	298	350	389	454	496
Overall size (mm)	Width	480	480	590	765	1600	1890
	Depth	250	832	965	1280	1550	1120
	Height	550	1050	1250	1330	1620	1490
Power(kw)	Hook	1.1	2.2	3	4.5	9	12
	Bowl		/	0.375	0.75	0.55	1.5
Voltage(v)		220	220/380	380	380	380	380
Weight(kg)		43	130	300	425	640	1350

# DIVIDER ROUNDER

>>>>>



## DIVIDER



**WSK-636**  
Electric Divider

Model		WSK-636
Dough number of division		36
Dough division range (g)		30-100
Overall size (mm)	Width	520
	Depth	420
	Height	1220
Power(kw)		0.18
Voltage(v)		220/380
Weight(kg)		180
Standard accessory		2 pieces of division plates



**WSK-D-16/20**  
Hydraulic Divider

Model		WSK-16	WSK-D-20
Dough number of division		16	20
Dough division range (g)		125-1000	100-800
Overall size (mm)	Width	620	
	Depth	810	
	Height	1100	
Power(kw)		1.5	
Voltage(v)		380	
Weight(kg)		350	
Standard accessory		4 pieces of supports for cleaning	



**WSK-330**  
Semi-Automatic Divider Rounder

## DIVIDER ROUNDER

### WSK-330 Semi-Automatic Divider Rounder

Model	WSK-330	
Dough number of division	30	
Dough division range (g)	30-100	
Overall size (mm)	Width	650
	Depth	710
	Height	2050
Power(kw)	0.75	
Voltage(v)	380	
Weight(kg)	340	
Standard accessory	3 pcs of plastic plates	



**WSK-330A**  
Fully Automatic Divider Rounder

### WSK-330A Fully Automatic Divider Rounder

Model	WSK-330A	
Dough number of division	30	
Dough division range (g)	30-100	
Overall size (mm)	Width	800
	Depth	600
	Height	1600
Power(kw)	1.1	
Voltage(v)	380	
Weight(kg)	560	
Standard accessory	3 pcs of plastic plates	

## SHEETER

>>>>>>



# SHEETER



WSK-520E / 630E



WSK-450B / 520B



WSK-630A  
Fully Automatic Sheeter

Model	WSK-450B	WSK-520B	WSK-520E	WSK-630E	WSK-630A
Type	Desktop	Desktop	Floor	Floor	Fully auto
Working width(mm)	400	480	500	585	585
Length of conveyor (mm)	850	1000	1000	1400	1400
Distance between the rollers (mm)	1-35	1-35	1-50	1-50	1-50
Size(mm)(opened working table)	Width	1770	2080	2540	3480
	Depth	820	880	950	1040
	Height	620	620	1270	1270
Size(mm)(folded working table)	Width	750	750	1750	2048
	Depth	820	880	950	1040
	Height	710	840	1750	2000
Power(kw)	0.56	0.56	0.75	0.75	0.75
Voltage(v)	220/380	220/380	220/380	380	380
Weight(kg)	117	125	232	260	300



# MOULDER

>>>>>

# MOULDER



WSK-280



WSK-307



WSK-380

Model	WSK-280	WSK-307	WSK-380
Output ( pieces/hr )	1800	2000	2500
Dough range (g)	30-350	30-600	50-900
Width (mm)	280	380	/
Width adjustment between the rollers (mm)	0.3-17	0.3-17	/
Overall size (mm)	Width	530	680
	Depth	1000	1680
	Height	1060	1135
Power(kw)	0.37	0.75	0.375
Voltage(v)	220/380	380	380
Weight(kg)	145	210	285



# SLICER

>>>>>>



Wuxi Xiangjing Machinery Co., Ltd  
(Sino-Japanese Joint Venture)

## SLICER



WSK-31



WSK-202

### Slicer

Model		WSK-31
Thickness		Standard thickness: 12mm Others: 10-48 mm Can be tailored
Max. size of bread	Length	370
	Height	130
Overall size (mm)	Width	556
	Depth	720
	Height	720
Power(kw)		0.18
Voltage(v)		220
Weight(kg)		70

### Single piece slicer

Model		WSK-202
Thickness (mm)		5-55
Max. height of bread(mm)		120
Max. width of bread(mm)		195
Overall size (mm)	Width	560
	Depth	450
	Height	340
Dia. Of blade		195
Power(kw)		0.23
Voltage(v)		220
Weight(kg)		17.5



Wuxi Xiangjing Machinery Co., Ltd  
(Sino-Japanese Joint Venture)

## SLICER



WSK-203

### Continuous Slicer

Model		WSK-203
Thickness (mm)		12
Max. length of bread(mm)		550
Max. width of bread(mm)		180
Overall size (mm)	Width	1600
	Depth	1285
	Height	1380
Power(kw)		1.1
Voltage(v)		220
Weight(kg)		340



# PROOFER

>>>>>>

# PROOFER







MTH



CCTH



FEH-16/32

Model	MTH	CCTH	FEH-16	FEH-32	
Quantity of trays	7	14	16	32	
Tray size (mm)	400*600	400*600	400*600	400*600	
Shelves number	7	7	16	16	
Space between the shelves (mm)	90	90	90	90	
Placement of trays					
Overall size (mm)	Width	730	780	554	750
	Depth	800	1160	800	1000
	Height	845	800	1820	1820
Door	Single door	Single door	Double doors	Double doors	
Power(kw)	0.9	0.9	1.5	2.3	
Voltage(v)	220	220	220	220	
Weight(kg)	80	80	200	300	
Control mode	Computer	Computer	Computer	Computer	
Surface material	SUS430	SUS430	SUS430	SUS430	
Humidification method	Water spray	Water spray	Water spray	Water spray	



Wuxi Xiangjing Machinery Co., Ltd  
(Sino-Japanese Joint Venture)

## RACK PROOFER



FEH-1R/2R



FEH-4R

Model		FEH-1R	FEH-2R		FEH-4R
Quantity of racks		1	2	2	4
Tray size(mm)		400*600	400*600	400*600	400*600
Rack size (mm)		675*810*1800	675*810*1800	675*810*1800	675*810*1800
Placement of racks					
Overall size (mm)	Width	820	820	1400	2190
	Depth	1165	1165	1000	2000
	Height	2130	2130	2130	2290
Door		Single door	Single door	Double doors	Double doors
Power(kw)		2	2	2	4
Voltage(v)		220	220	220	220
Weight(kg)		130	130	160	350
Surface material		SUS430	SUS430	SUS430	SUS430
Humidification method		Water spray	Boiling water	Boiling water	Boiling water
Control mode		Computer	Computer	Computer	Computer
Remark		It can be tailored made.			



Wuxi Xiangjing Machinery Co., Ltd  
(Sino-Japanese Joint Venture)

## RETARDER PROOFER



FED-12



FED-1-36



FED-2-32



FED-1-18



FED-1-18B



FED-2-18



FED-2-18B

Model		FED-12	FED-1-18/18B	FED-2-18/18B	FED-1-36	FED-2-32
Quantity of trays		12	18	18	36	32
Tray size (mm)		400*600	400*600	400*600	400*600	400*600
No. of shelves		12	18	18	18	16
Placement of trays						
Overall size (mm)	Width	780	600	600	800	800
	Depth	1165	1000	1000	1215	1215
	Height	1035	2050	2050	2050	2050
Door		Single door	Single door	Double doors	Single door	Double doors
Power(kw)		1.8	1.8	1.8	2.5	2.5
Voltage(v)		220	220	220	220	220
Weight(kg)		200	350	350	450	450
Control mode		Computer	Computer	Computer	Computer	Computer
Surface material		SUS430	SUS430	SUS430	SUS430	SUS430
Humidification method		Boiling water	Boiling water	Boiling water	Boiling water	Boiling water
Remark		Perspective windows and glass door as optional				





## RACK RETARDER PROOFER




FED-1R/2R



FED-4R

Model	FED-1R	FED-2R		FED-4R	
Quantity of racks	1个	2个	2个	4个	
Tray size(mm)	400*600	400*600	400*600	400*600	
Rack size (mm)	675*810*1800	675*810*1800	675*810*1800	675*810*1800	
Placement of racks					
Size (mm) (when rack is opened)	Width	1215	820	1400	2190
	Depth	1070	1165	1000	2000
	Height	2130	2130	2130	2290
Door	Single door	Single door	Double doors	Double doors	
Compressor power(kw)	1.125	1.75	1.75	2	
Heat exchanger power(kw)	1.3	4	4	6	
Voltage(v)	380	380	380	380	
Weight(kg)	200	250	250	400	
Surface material	SUS430	SUS430	SUS430	SUS430	
Humidification method	Boiling water	Boiling water	Boiling water	Boiling water	
Control mode	Computer	Computer	Computer	Computer	
Remark	It can be tailored made.				

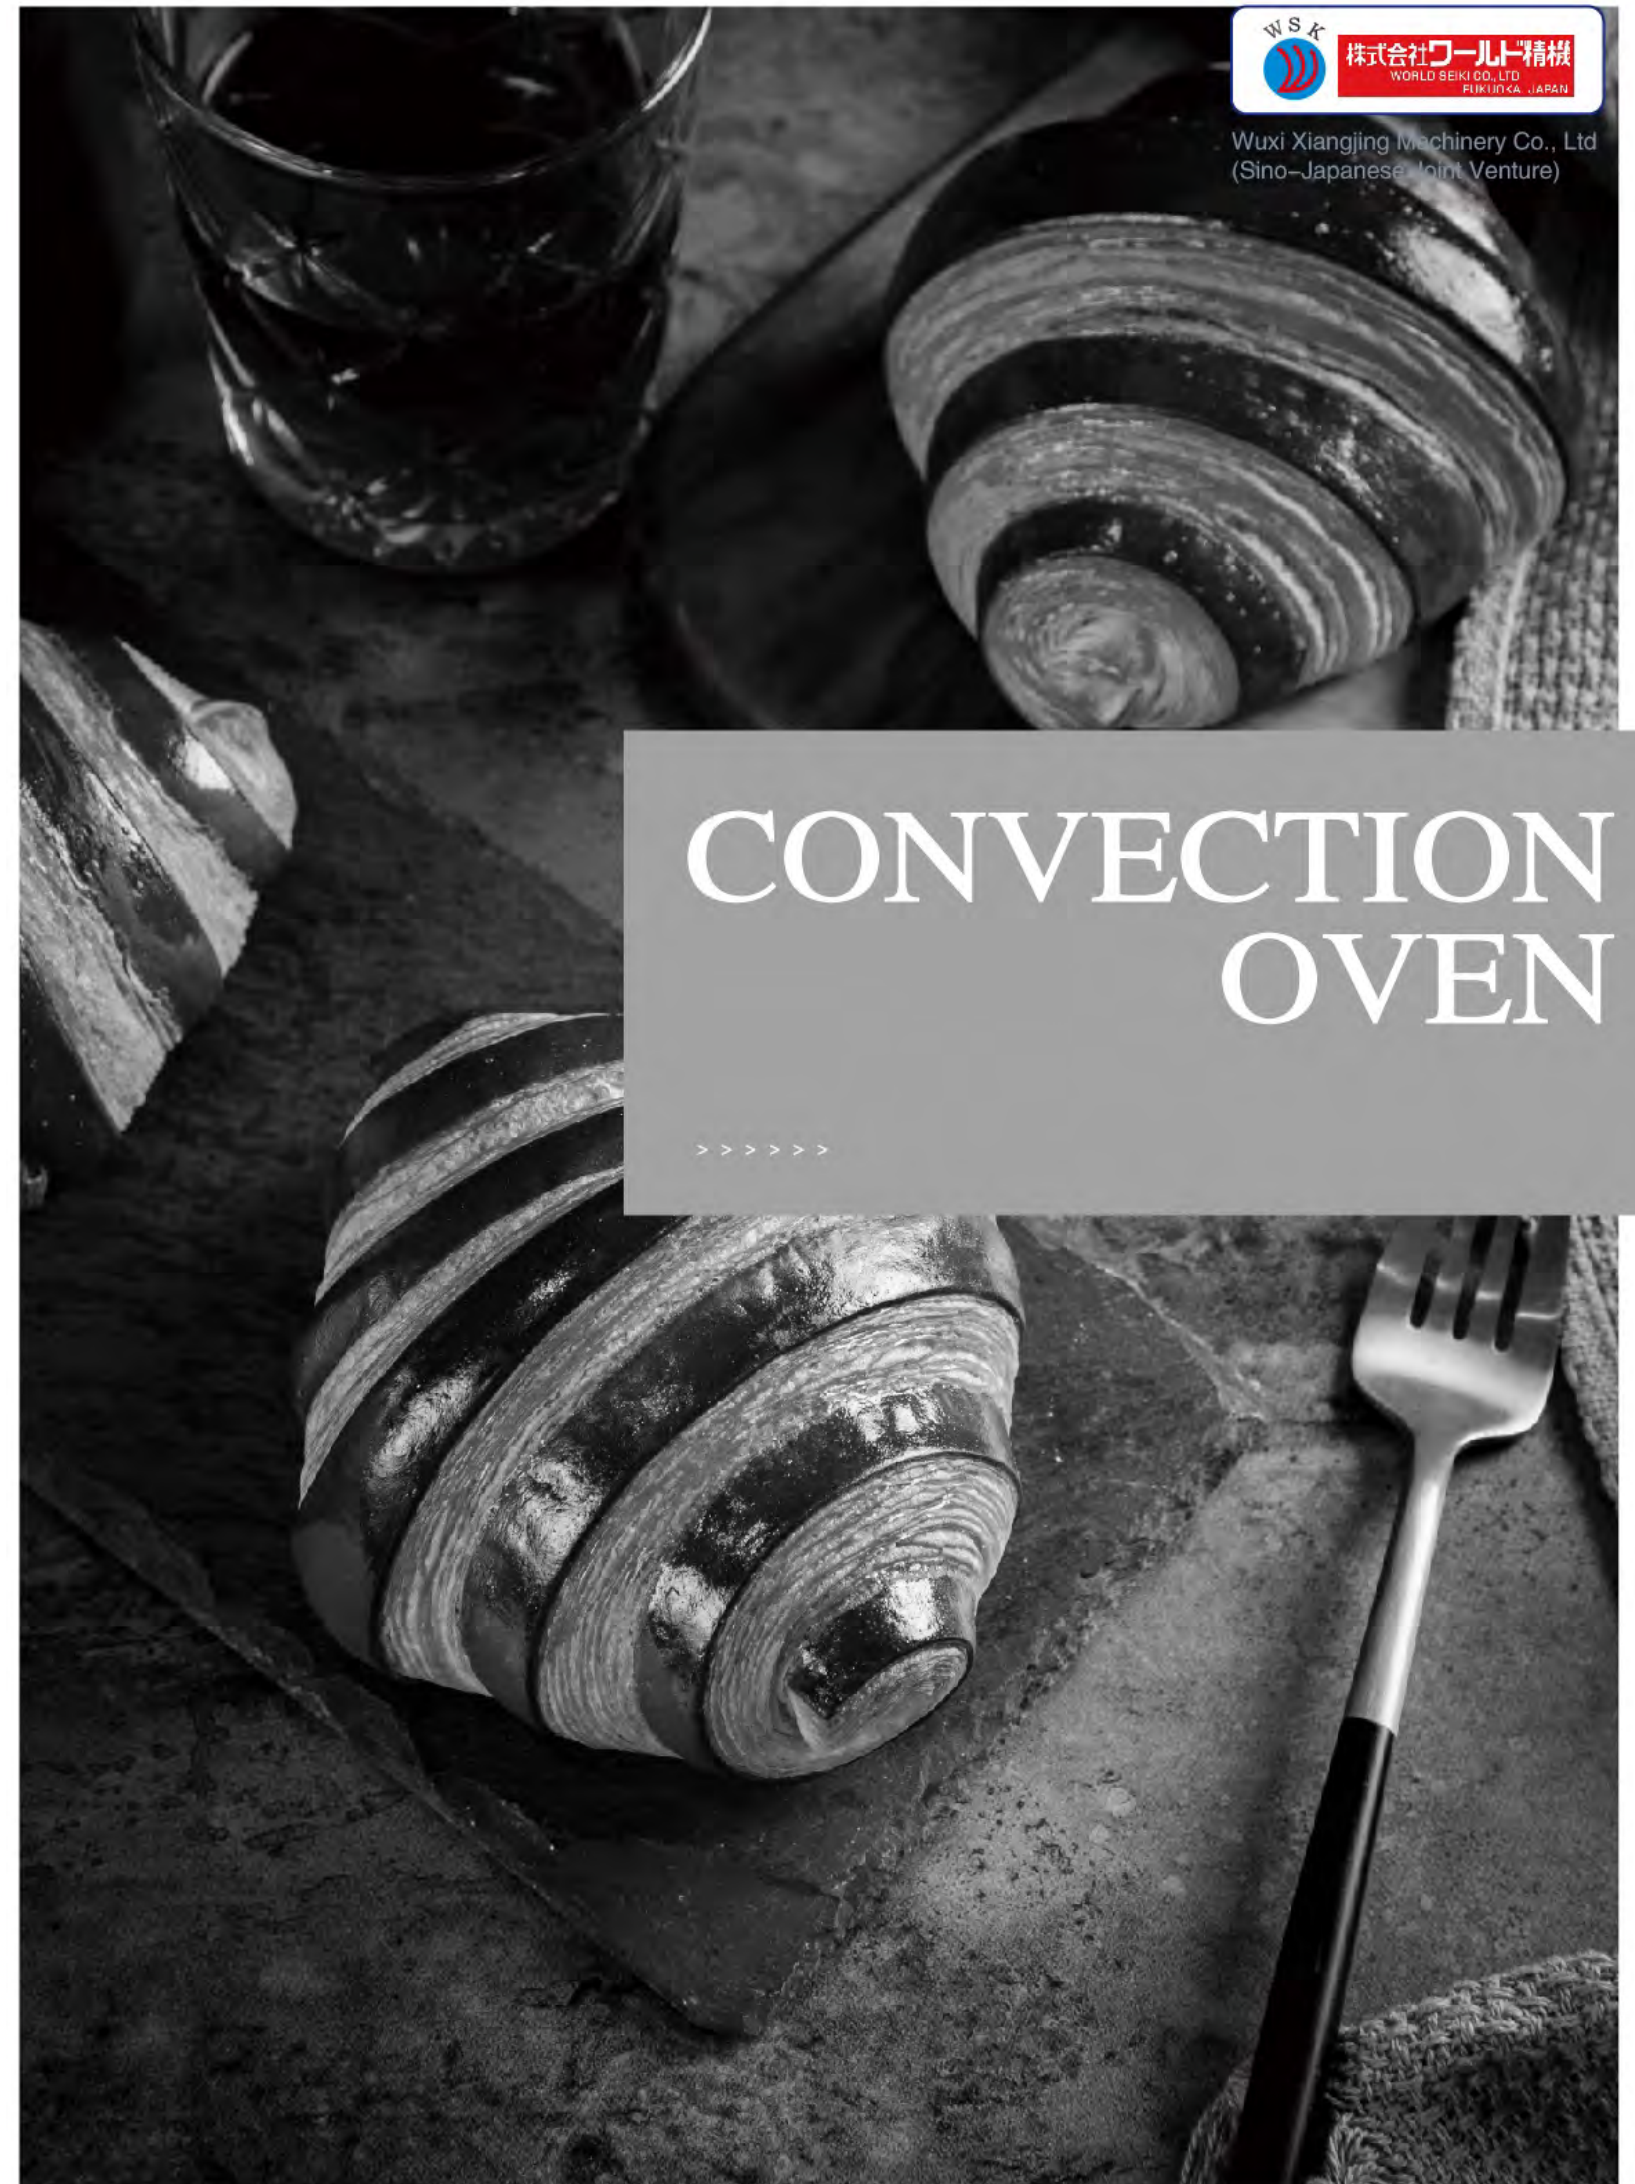

## CONVECTION OVEN

>>>>>>

# ELECTRIC CONVECTION OVEN



# ELECTRIC CONVECTION OVEN

Model	WSK-705E	WSK-710E
Quantity of trays	5	10
Tray size (mm)	400*600	400*600
Distance between the shelves (mm)	90	90
Overall size (mm)	Width	780
	Depth	1253
	Height	690 / 1710
Power(kw)	9.8	19.5
Voltage(v)	380 / 220	380
Weight(kg)	149	270
Inner side material of chamber	Stainless steel	
Surface material	Stainless steel	



# GAS CONVECTION OVEN



WSK-705G



WSK-710G

Model	WSK-705G	WSK-710G
Quantity of trays	5	10
Tray size (mm)	400*600	400*600
Distance between the shelves (mm)	90	90
Overall size (mm)	Width	810
	Depth	1250
	Height	1710
Power(kw)	0.5	1
Heat value (kcal/h)	8730	17500
Voltage(v)	220	
Weight(kg)	186	270
Inner side material of chamber	Stainless steel	
Surface material	Stainless steel	



# OVEN

>>>>>





## MINI ELECTRIC OVEN



## ELECTRIC DECK OVEN



Model		WSK-901	WEE
Quantity of trays		1	1
Tray size (mm)		400 * 600	400 * 600
Placement of trays			
Overall size (mm)	Width	780	730
	Depth	1000	880
	Height	360	530
Inner size (mm)	Width	420	430
	Depth	620	660
	Height	200	200
Each deck power(kw)		2.8	2.8
Voltage(v)		220	220
Weight(kg)		60	70
Temperature range(℃)		300	300
Surface material		SUS430HL	SUS430HL
Optional		Stone plate exhaust hood	Stone plate



WEE + MTH

Model		JE21T-R	JE21T-R+R	JE22T-R	JE22T-R+R
Deck number		1	1	2	2
Quantity of tray		2	2	4	4
Tray size (mm)		400*600	400*600	400*600	400*600
Placement of trays					
Overall size (mm)	Width	1350	1350	1350	1350
	Depth	960	960	960	960
	Height	560	1320	1400	1640
Inner size (mm)	Width	850	850	850	850
	Depth	635	635	635	635
	Height	230	230	230	230
Power(kw)		5	5	10	10
Voltage(v)		220 / 380	220 / 380	380	380
Weight(kg)		200	260	390	450
Temperature range(℃)		300	300	300	300
Surface material		SUS430HL	SUS430HL	SUS430HL	SUS430HL
Optional		Steam, stone plate			



## ELECTRIC DECK OVEN



JE32T-R






JE23T-R

Model	JE23T-R	JE32T-R	JE33T-R	JE42T-R	JE43T-R	JE42YW-R	JE43YW-R	JE63YW-R
Deck number	3	2	3	2	3	2	3	3
Quantity of trays	6	6	9	8	12	8	12	18
Tray size(mm)	400*600	400*600	400*600	400*600	400*600	400*600	400*600	400*600
Placement of trays								
Overall size (mm)	Width	1350	1720	1720	1350	1350	1720	1720
	Depth	960	960	960	1570	1570	1240	1240
	Height	1720	1400	1720	1400	1720	1720	1720
Inner size (mm)	Width	850	1220	1220	850	850	1220	1220
	Depth	635	635	635	1235	1235	905	905
	Height	230	230	230	230	230	230	230
Power(kw)	15	12	18	14	21	14	21	27
Voltage(v)	380	380	380	380	380	380	380	380
Weight(kg)	650	600	900	670	950	710	1100	1550
Temperature range(°C)	300	300	300	300	300	300	300	300
Surface material	SUS430HL	SUS430HL	SUS430HL	SUS430HL	SUS430HL	SUS430HL	SUS430HL	SUS430HL
Optional	Steam, stone plate							

## ELECTRIC DECK OVEN



E24T-R  
E44T-R  
E44YW-R

Model	E24T-R	E44T-R	E44YW-R
Deck number	4	4	4
Quantity of trays	8	16	16
Tray size(mm)	400*600	400*600	400*600
Placement of trays			
Overall size (mm)	Width	1350	1350
	Depth	960	1570
	Height	2220	2220
Inner size (mm)	Width	850	850
	Depth	635	1235
	Height	230	230
Power(kw)	20	28	28
Voltage(v)	380	380	380
Weight(kg)	870	1270	1270
Temperature range(°C)	300	300	300
Surface material	SUS430HL	SUS430HL	SUS430HL
Optional	Steam, stone plate		

## ELECTRIC DECK OVEN

## GAS DECK OVEN

Optional glass door



Optional color



Optional control panel



JE22T-NH-R

Model	FG21T-R	FG21T-R+R	FG22T-R	FG22T-R+R
Deck number	1	1	2	2
Quantity of trays	2	2	4	4
Tray size (mm)	400*600	400*600	400*600	400*600
Placement of trays				
Overall size (mm)	Width	1330	1330	1330
	Depth	1010	1010	1010
	Height	700	1300	1200
Inner size (mm)	Width	880	880	880
	Depth	650	650	650
	Height	230	230	230
Power(kw)	0.131	0.131	0.251	0.251
Heat value (kcal/hr)	8000	8000	16000	16000
Voltage(v)	220	220	220	220
Weight(kg)	200	260	400	450
Temperature range(℃)	300	300	300	300
Surface material	SUS430HL	SUS430HL	SUS430HL	SUS430HL
Optional	Steam, stone plate			

## GAS DECK OVEN



FG22T-NH-R



FG23T-R

## EUROPEAN STYLE ELECTRIC DECK OVEN











WSK-23T-R



WSK-43YW-R



WSK-44YW-R

Model	FG23T-R	FG32T-R+R	FG33T-R	FG42T-R+R	FG43T-R	FG42YW-R+R	FG43YW-R	FG63YW-R
Deck number	3	2	3	2	3	2	3	3
Quantity of trays	6	6	9	8	12	8	12	18
Tray size (mm)	400*600	400*600	400*600	400*600	400*600	400*600	400*600	400*600
Placement of trays								
Overall size (mm)	Width	1330	1700	1700	1330	1330	1700	1700
	Depth	1010	1010	1010	1660	1660	1280	1280
	Height	1820	1600	1820	1600	1820	1600	1820
Inner size (mm)	Width	880	1250	1250	880	880	1250	1250
	Depth	650	650	650	1300	1300	920	920
	Height	230	230	230	230	230	230	230
Power(kw)	0.368	0.251	0.368	0.297	0.446	0.303	0.45	0.45
Heat value (kcal/hr)	24000	20000	30000	32000	48000	36000	54000	54000
Voltage(v)	220	220	220	220	220	220	220	220
Weight(kg)	630	600	900	670	940	710	1000	1550
Temperature range(°C)	300	300	300	300	300	300	300	300
Surface material	SUS430HL	SUS430HL	SUS430HL	SUS430HL	SUS430HL	SUS430HL	SUS430HL	SUS430HL
Optional	Steam, stone plate							

Model	WSK-23T-R	WSK-24T-R	WSK-23YW-R	WSK-24YW-R
Deck number	3	4	3	4
Quantity of trays	6	8	6	8
Tray size (mm)	400*600	400*600	400*600	400*600
Placement of trays				
Overall size (mm)	Width	1265	1265	1065
	Depth	1000	1000	1200
	Height	1820	1820	1820
Inner size (mm)	Width	850	850	650
	Depth	700	700	900
	Height	210	210	210
Power(kw)	11.28	15.04	11.28	15.04
Voltage(v)	220 / 380	220 / 380	220 / 380	220 / 380
Weight(kg)	650	870	650	870
Temperature range(°C)	300	300	300	300
Surface material	SUS430HL	SUS430HL	SUS430HL	SUS430HL
Optional	Steam, stone plate			

## EUROPEAN STYLE ELECTRIC DECK OVEN







WSK-44T-R



WSK-22T-NH-R



Optional control panel

Model	WSK-33T-R	WSK-34T-R	WSK-43YW-R	WSK-44YW-R
Deck number	3	4	3	4
Quantity of trays	9	12	12	16
Tray size (mm)	400*600	400*600	400*600	400*600
Placement of trays				
Overall size (mm)	Width	1665	1665	1665
	Depth	1000	1000	1200
	Height	1820	1820	1820
Inner size (mm)	Width	1250	1250	1250
	Depth	700	700	900
	Height	210	210	210
Power(kw)	16.56	22.08	19.2	25.6
Voltage(v)	380	380	380	380
Weight(kg)	900	1200	1100	1460
Temperature range(℃)	300	300	300	300
Surface material	SUS430HL	SUS430HL	SUS430HL	SUS430HL
Optional	Steam, stone plate			



## RACK OVEN

>>>>>>

# RACK OVEN



Aluminum alloy trolley

# TROLLEY

Model	RBD-1	RTD-1	RBD-2	RTD-2	RBD-3	RTD-3	
Quantity of trays	18	18	36	36	36	36	
Tray size ( mm )	400*600 460*660 460*720 460*760	400*600 460*660 460*720 460*760	400*600	400*600	400*600 460*660 460*720 460*760	400*600 460*660 460*720 460*760	
Motor power ( kw )	1.1	1.1	1.6	1.6	2.7	2.7	
Total power ( kw )	Electric	/	47	/	60	/	
	Diesel/gas(kcal/h)	/	43850	/	49870	/	
Energy	Electric	Diesel/gas	Electric	Diesel/gas	Electric	Diesel/gas	
Temperature range (°C)	0-300	0-300	0-300	0-300	0-300	0-300	
Inlet air pressure (kpa)	3.5-6 ( diesel )						
Size (mm)	Width	1880	1880	2185	2185	2420	2420
	Depth	1220	1220	1395	1395	2350	2350
	Height	2470	2470	2470	2470	2600	2600
Weight	1050	1150	1520	1620	1850	1950	
Voltage	3 phases						



Stainless steel trolley



Stainless steel trolley



Totally closed aluminum alloy trolley